

Novaflex[®] LPG Composite Hose

Novaflex Liquid Petroleum Gas Composite style hose is designed for the transfer of liquid petroleum gases.

Manufactured with galvanized steel inner and outer wires and Polyamide reinforcement. Available with crimped on schedule 80 carbon steel or stainless steel threaded ends. Also available with ANSI flanges. All assemblies are hydrostatically tested and are tested for electrical continuity. CSA certified to CAN/CGA-8.1-M86

Construction

Diameters: 1 1/4", 2"

Maximum working pressure: 350psi

Safety factor: 5:1


Bend Radius: 1 1/4" = 5", 2" = 7"

Weight per foot: 1 1/4" = 1.1lbs, 2" = 1.7lbs

Temperature Range: -130°F (-90°) to 176°F (+80° C).

Rated for full vacuum

Maximum Length: 100 ft.

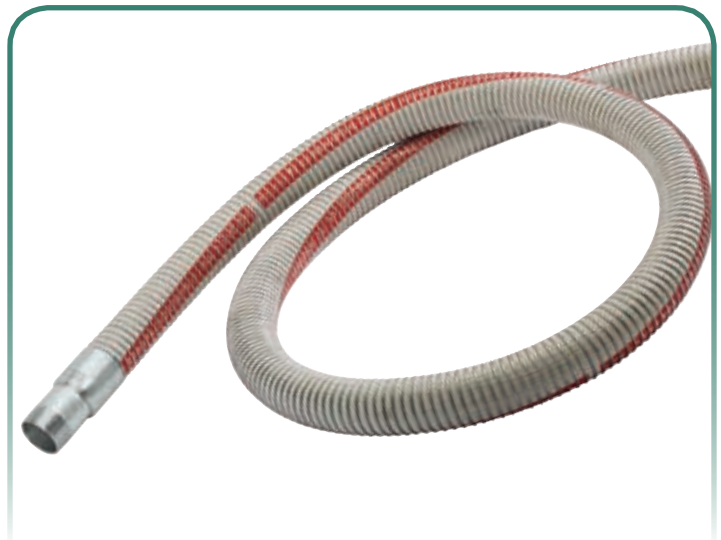

It is impossible to test Novaflex hose under all of the conditions to which it might be subjected in the field. It is therefore the buyer and/or end users' responsibility to test all hose products under conditions that duplicate the service conditions prior to installation.

Indianapolis, IN	Tel 317.334.1444	Fax 317.334.1535	800.526.6288
Haw River, NC	Tel 336.578.2161	Fax 336.578.5554	800.334.4270
Berlin, NJ	Tel 856.768.2275	Fax 856.768.2385	800.225.0215
Ajax, ON	Tel 905.686.5200	Fax 905.686.8349	

THE
NOVAFLEX[®]
GROUP 

Email: sales@novaflex.com
Website: www.novaflex.com