



# Z-RIGID ALL-FUEL MAX DRAFT

## Z-Rigid Smooth Wall Liner

- Designed for use with All Fuels - Wood, Pellet, Corn, Oil, Gas
- Fusion welded seams
- Precision engineered for lowest flow resistance
- cULus listed to 2100°F creosote burnout test
- Lifetime warranty



### Z-RIGID SPECIFICATIONS

Material:	type 304 stainless steel, 0.018" thickness (316L optional)
Construction:	fusion welded seams
Listing:	cULus 1777/S635 Chimney Liner System
Use:	Category 1 natural draft appliances; wood, pellet, gas, propane, oil

### Rain Cap

- \* Wind-proof
- \* Bird resistant
- \* Attractive
- \* Prevents entrance of moisture/debris
- \* Corrosion resistant

### Flashing


- \* Full 16" x 16" base - accommodates all chimney sizes
- \* Welded collar stabilizes liner, provides clearance from snow accumulation
- \* Prevents entrance of snow and rain into chimney cavity

### Z-Rigid Liner

- \* Fusion welded seams - no filler material
- \* Engineered super close tolerance fit
- \* Expanded ends provide smooth interior - no crimped ends
- \* Pre-punched holes - no drilling required
- \* High corrosion resistant 304 S/S (Special order 316 available)
- \* Easy to assemble

### Flex Tee (Cleanout)

- \* 3pc. with removable snout and clean out
- \* All stainless steel
- \* Fail-safe mechanical connection from snout to body

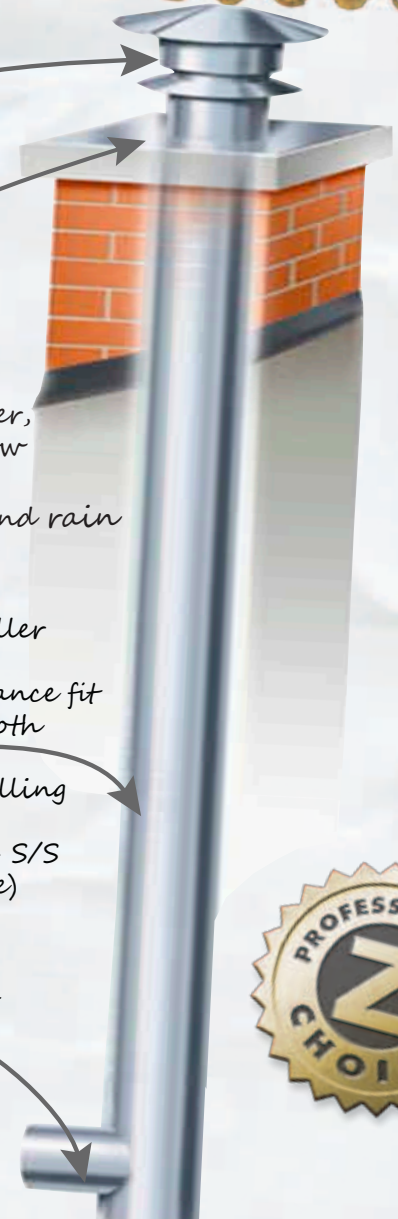

U.S.A. 1.800.654.5600  
CANADA 416.679.0045

Fax 603.669.0309  
Fax 416.679.0051

EMAIL sales@z-flex.com  
WEBSITE www.z-flex.com



Specialized Vents, Hoses Ducts & Connectors for any use, any industry